



D2

INTERNATIONAL APPLICATION PUBLISHED UNDER THE PATENT COOPERATION TREATY (PCT)

<p>(51) International Patent Classification ⁶ : A61M 25/01</p>	<p>A1</p>	<p>(11) International Publication Number: WO 96/32980 (43) International Publication Date: 24 October 1996 (24.10.96)</p>
<p>(21) International Application Number: PCT/NL96/00174 (22) International Filing Date: 19 April 1996 (19.04.96) (30) Priority Data: 1000183 20 April 1995 (20.04.95) NL (71)(72) Applicant and Inventor: JACOBS, Clemens, Josephus [NL/NL]; Veenlanden 40, NL-3871 RD Hoevelaken (NL). (74) Agent: BARENDREGT, F.; Van Exter Polak & Charlouis B.V., P.O. Box 3241, NL-2280 GE Rijswijk (NL).</p>	<p>(81) Designated States: AL, AM, AT, AU, AZ, BB, BG, BR, BY, CA, CH, CN, CZ, DE, DK, EE, ES, FI, GB, GE, HU, IS, JP, KE, KG, KP, KR, KZ, LK, LR, LS, LT, LU, LV, MD, MG, MK, MN, MW, MX, NO, NZ, PL, PT, RO, RU, SD, SE, SG, SI, SK, TJ, TM, TR, TT, UA, UG, US, UZ, VN, ARIPO patent (KE, LS, MW, SD, SZ, UG), Eurasian patent (AM, AZ, BY, KG, KZ, MD, RU, TJ, TM), European patent (AT, BE, CH, DE, DK, ES, FI, FR, GB, GR, IE, IT, LU, MC, NL, PT, SE), OAPI patent (BF, BJ, CF, CG, CI, CM, GA, GN, ML, MR, NE, SN, TD, TG).</p> <p>Published <i>With international search report.</i> <i>Before the expiration of the time limit for amending the claims and to be republished in the event of the receipt of amendments.</i> <i>In English translation (filed in Dutch).</i></p>	
<p>(54) Title: CATHETER</p>		
<p>The diagram shows a side view of a catheter assembly. It consists of a long, thin tubular catheter body (2) with a proximal end on the left and a distal end on the right. A rigid shaping wire (4) is inserted into the tubular body. The proximal end of the wire (4) is connected to a handle assembly (1) that includes a sliding mechanism (5) and a control knob (6). The distal end of the wire (4) is shaped into a specific form (10). A proximal connector (8) is attached to the tubular body (2). A control element (3) is located near the proximal end of the tubular body. A proximal fitting (9) is also shown. A detail view (2b) shows a cross-section of the tubular catheter body (2).</p>		
<p>(57) Abstract</p>		
<p>A description is given of a catheter (1) which comprises at least one flexible tubular catheter body (2) with a proximal end and a distal end, and an element interacting with the tubular catheter body, which element produces bending or stretching of the distal end by means of axial movement. Said element comprises a rigid shaping wire (4) with a predetermined intrinsic shape of at least the distal end, which wire is accommodated in the tubular body (2) and is slidable back and forth inside the tubular catheter body (2). The distal end of the tubular catheter body (2) also has a predetermined intrinsic shape. An axial movement of the shaping wire (4) produces a specific change of shape in at least the distal end of the tubular catheter body (2), the specific shape being determined by the intrinsic shape of the shaping wire when it is present in the distal end, or by the intrinsic shape of the tubular catheter body (2) in the absence of the shaping wire (4).</p>		

FOR THE PURPOSES OF INFORMATION ONLY

Codes used to identify States party to the PCT on the front pages of pamphlets publishing international applications under the PCT.

AM	Armenia	GB	United Kingdom	MW	Malawi
AT	Austria	GE	Georgia	MX	Mexico
AU	Australia	GN	Guinea	NE	Niger
BB	Barbados	GR	Greece	NL	Netherlands
BE	Belgium	HU	Hungary	NO	Norway
BF	Burkina Faso	IE	Ireland	NZ	New Zealand
BG	Bulgaria	IT	Italy	PL	Poland
BJ	Benin	JP	Japan	PT	Portugal
BR	Brazil	KE	Kenya	RO	Romania
BY	Belarus	KG	Kyrgyzstan	RU	Russian Federation
CA	Canada	KP	Democratic People's Republic of Korea	SD	Sudan
CF	Central African Republic	KR	Republic of Korea	SE	Sweden
CG	Congo	KZ	Kazakhstan	SG	Singapore
CH	Switzerland	LI	Liechtenstein	SI	Slovenia
CI	Côte d'Ivoire	LK	Sri Lanka	SK	Slovakia
CM	Cameroon	LR	Liberia	SN	Senegal
CN	China	LT	Lithuania	SZ	Swaziland
CS	Czechoslovakia	LU	Luxembourg	TD	Chad
CZ	Czech Republic	LV	Latvia	TG	Togo
DE	Germany	MC	Monaco	TJ	Tajikistan
DK	Denmark	MD	Republic of Moldova	TT	Trinidad and Tobago
EE	Estonia	MG	Madagascar	UA	Ukraine
ES	Spain	ML	Mali	UG	Uganda
FI	Finland	MN	Mongolia	US	United States of America
FR	France	MR	Mauritania	UZ	Uzbekistan
GA	Gabon			VN	Viet Nam

Short title: Catheter

The invention relates to a catheter of the type according to the preamble of claim 1, such as is disclosed by WO 92/14506. The wall of said catheter contains two wire-type elements which lie diametrically opposite each other and are slidable in the lengthwise direction, one being an elastic element which can assume both a curved and a straight shape, and the other being a 'stretch' element which has the tendency to prevent the elastic element from assuming the curved shape. Both elements run on into the distal end of the tubular catheter body. Axial movement of one of the elements causes the elastic element to deform from one to the other shape, and the distal end of the tubular catheter body is curved or stretched accordingly.

The structure of this catheter is complicated by the presence of the two elements, while its use, which requires not only manipulation of the catheter but also the operation of two further elements, is difficult. In addition, the free cross section of the lumen is limited by the presence of these two elements, which is a disadvantage if the catheter is being used for diagnostic purposes, for example for the introduction of contrast liquid.

The object of the invention is to overcome these disadvantages. This is achieved with a catheter of the type described in the characterizing part of claim 1.

The catheter according to the present invention, which has only one shaping wire, therefore has two "boundary shapes", that of the shaping wire and that of the catheter body. When the shaping wire has been pushed near to the distal end of the catheter body, the more flexible catheter body will assume the shape of the shaping wire. However, when the shaping wire is pushed back in the direction of the proximal end of the catheter, the catheter body will assume its predetermined intrinsic shape. By "intrinsic shape" we mean here the shape which the distal end of the catheter body assumes when the shaping wire has

been removed and the catheter body is free of any other influence of any kind.

By using a shaping wire of - curved - intrinsic shape, or a tubular catheter body of different - curved -
5 intrinsic shape, it is possible to obtain a change in the working shape of the catheter.

The "boundary shapes" of the catheter can be determined depending on the desired application, and "intermediate shapes" are, of course, also usable.

10 In particular, the distal end of the shaping wire is such a shape that it is suitable for linking up the right coronary artery.

The distal end of the catheter in this case is slightly curved in such a way that the catheter can easily
15 be pushed by way of an artery into the right coronary artery of a patient.

The distal end of the catheter body is preferably shaped in such a way that it is suitable for linking up the left coronary artery.

20 The reason for this measure is as follows: the shape of the distal end of the catheter which is suitable for linking up the left coronary artery differs, as is known, from the shape which is suitable for linking up in
25 the right coronary artery, in that the distal end of the former is a much more curved shape. The curve of this shape is such that a catheter with this shape of distal end cannot be introduced as such by way of one of the arteries into the body of the patient.

Until now, in heart catheterization it has been
30 customary for the abovementioned linking-up to use a feed wire inserted into the body almost to the aortic arch. A catheter with a specific shape of distal end, a shape corresponding to that of, for example, the right coronary artery, is then pushed along the feed wire until the distal
35 end has reached the desired place, and a contrast liquid is introduced into the coronary artery concerned by way of the catheter. After this action, the catheter is removed from the patient's body. In order also to introduce contrast liquid into the other coronary artery, i.e. the left one in

this case, a catheter with a specific shape of distal end, a shape corresponding to that of the left coronary artery, is again inserted into the patient's body along a feed wire. This method therefore requires the insertion of the
5 feed wire twice, and the insertion of a catheter twice is very onerous for the patient and exposes the latter to X-rays during a relatively long period.

A catheter of the abovementioned type makes it possible to introduce contrast liquid into both the right
10 and the left coronary artery in one operation, without changing catheter bodies.

To this end, the catheter is first of all inserted into the right coronary artery with the shaping wire fully slid in, and contrast liquid is introduced at this point by
15 way of the catheter. The catheter is subsequently moved over a short distance out of the right coronary artery, and the shaping wire is slid back so that the distal end of the catheter body assumes the shape of the left coronary artery. During the deformation of the distal end the
20 catheter is now pushed into the left coronary artery, and contrast liquid is then introduced at this point. After the contrast liquid has been introduced, the catheter is returned to its original state by sliding in the shaping wire again, and the catheter is removed from the patient's
25 body. The intermediate shapes assumed by the distal end of the catheter are such that with them the catheter can also be linked into any coronary bypass vein which may be present.

A further advantageous embodiment of the catheter
30 according to the present invention is described in subclaim 4.

The invention will be explained in greater detail below with reference to the appended drawing, in which:

Fig. 1 shows diagrammatically and partially in
35 section a side view of the catheter according to the invention;

Fig. 2 shows diagrammatically a section of the distal end of the catheter in a first embodiment;

Fig. 3 shows the predetermined intrinsic shape of

the shaping wire; and

Fig. 4 shows diagrammatically a section of the distal end of the catheter in a second embodiment.

Figure 1 shows a catheter 1 according to the invention. The catheter 1 comprises a flexible tubular catheter body 2 with a distal end 2a and a proximal end 2b. The catheter body 2 is made of a synthetic resin, such as, for example, nylon, polyethylene or polyurethane. The catheter body 2 contains a relatively rigid shaping wire 4. Said shaping wire 4 can be made of stainless steel, and is preferably coated with a layer of Teflon®, in order to prevent red blood cells from accumulating on the metal and thereby causing thrombosis. The inner lumen 10 of the catheter body 2 is large enough for a suitable quantity of contrast liquid to pass through.

The proximal end of the tubular catheter body 2 interacts with a control element, comprising a handle 3 in which a sliding element 9 is accommodated. In the embodiment shown in Figure 1 a known so-called Y-connector 5, provided with a supply aperture or infusion port 6, is situated between the catheter body and the control element 3. Reference number 8 indicates a connecting element which connects the tubular catheter body 2 to the Y-connector 5.

As said above, the shaping wire 4 runs through the catheter body 2 and is attached by its proximal end to the sliding element 9. When the sliding element 9 is slid up to the Y-connector 5, the distal end of the shaping wire 4 will be situated at the same, or virtually the same, position as the distal end of the tubular catheter body 2. The shape of the catheter body, which is relatively more flexible than the shaping wire, is then determined by the shape of the shaping wire 4. This situation is shown in Figure 2; the shape of the distal end of the catheter shown there, indicated by reference number 13, is then the same as the intrinsic shape of the shaping wire and is suitable for linking up the right coronary artery. In this shape the catheter can also be inserted into the body of the patient. The predetermined intrinsic shape of the shaping wire is shown in Figure 3.


When the sliding element 9 is slid away from the Y-connector 5, the shaping wire 4 is also slid back, and the catheter body 2 assumes its predetermined intrinsic shape again. This situation is shown in Figure 4, and the shape
5 shown, indicated by reference number 12, is suitable for linking up the left coronary artery. However, in this shape the catheter cannot be introduced into the patient's body.

When the sliding element 9 is moved the distal end of the tubular catheter body 2 assumes a number of
10 intermediate shapes, which also make the catheter suitable for linking into a coronary bypass vein.

When the catheter according to the present invention is being used for diagnostic purposes, the catheter 1 with a shape of distal end which is shown in
15 Figure 3 is inserted by way of the femoral artery into the patient's body up to the right coronary artery. If desired, it is also possible first to insert a feed wire up to the aortic arch, and then to slide the catheter along the feed wire. However, the use of a feed wire is not necessary when
20 the catheter according to the present invention is used. After the insertion of the catheter 1, a contrast liquid is introduced through the infusion port 6. The catheter 1 is then withdrawn a short distance from the right coronary artery and moved into the left coronary artery, while the
25 shaping wire 4 is pulled by means of the sliding element 9 out of the distal end of the tubular catheter body 2, and the catheter body 2 assumes its intrinsic shape, which is suitable for linking up the left coronary artery. After the introduction of contrast liquid into the left coronary
30 artery, while the catheter is being withdrawn, the sliding element 9 is moved in the direction of the Y-connection 5, so that the catheter 1 can be moved in its initial state out of the patient's body again. If a coronary bypass vein is present, the catheter 1 can also be used for the
35 introduction of contrast liquid at this point.

C L A I M S

1. Controllable catheter (1), comprising a flexible tubular catheter body (2) with a distal end (2a) and a proximal end (2b), in which by means of a controlled axial movement of a wire-type element interacting with the distal end a bending or stretching of said end can be produced,
5 **characterized in that**
- the element interacting with the distal end of the catheter body (2) is a rigid shaping wire (4) which
 - is completely enclosed by the catheter body (2);
 - 10 and
 - at least at the part thereof interacting with the distal end has a predetermined curved intrinsic shape;
 - the distal end of the tubular catheter body (2) also
15 has a predetermined curved intrinsic shape,
 - the above in such a way that an axial movement of the shaping wire (4) produces a specific shape change in the distal end of the catheter, the shape obtained in this way being determined by the curved intrinsic
20 shape of the shaping wire (4) when it is present in the distal end, or by the curved intrinsic shape of the tubular catheter body (2) in the absence of the shaping wire (4).
2. Catheter according to claim 1, **characterized in**
25 **that** the distal end of the shaping wire (4) has such a curved intrinsic shape that it is suitable for linking up the right coronary artery.
3. Catheter according to claim 1 or 2, **characterized**
30 **in that** the distal end of the tubular catheter body (2) has such a curved intrinsic shape that it is suitable for linking up the left coronary artery.

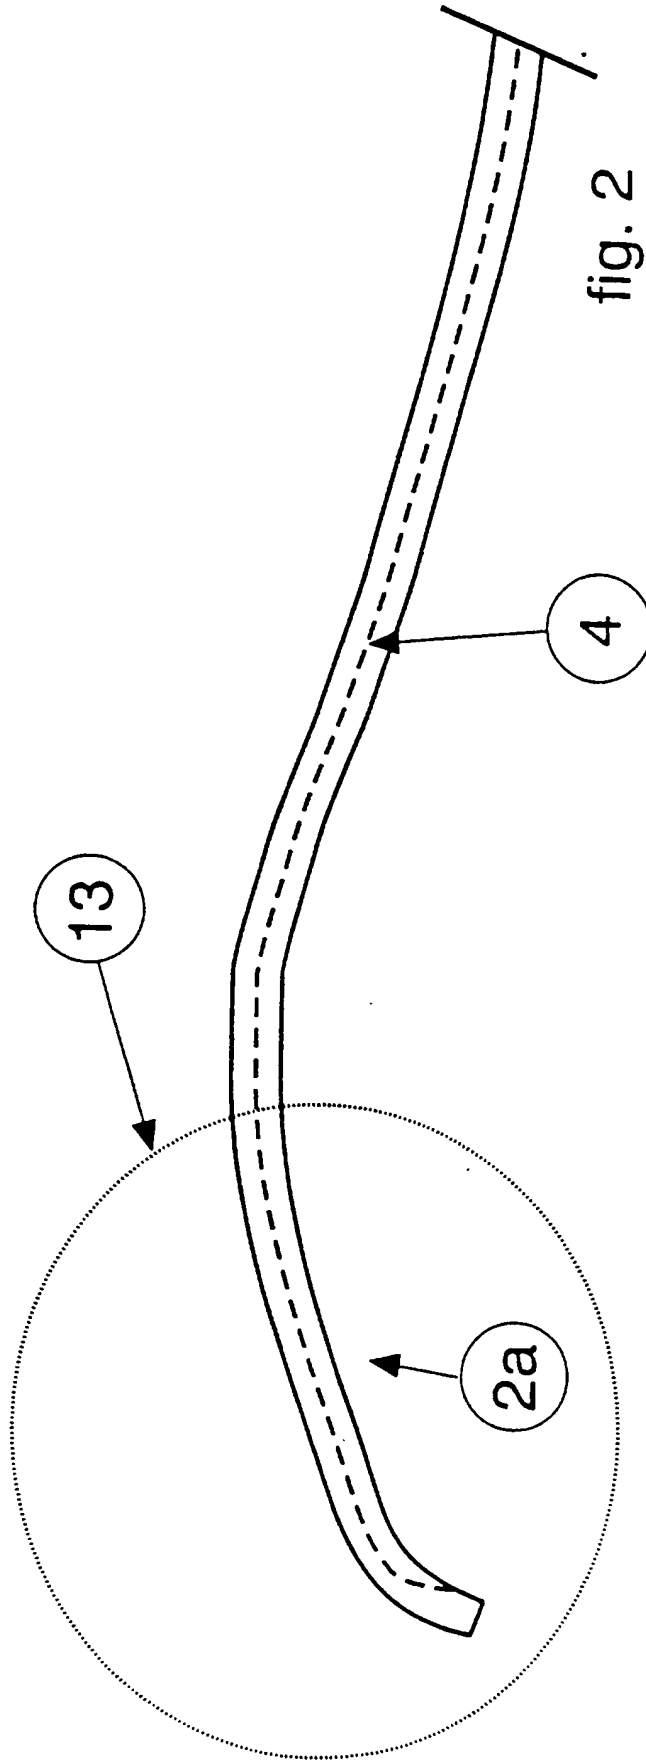

3/4

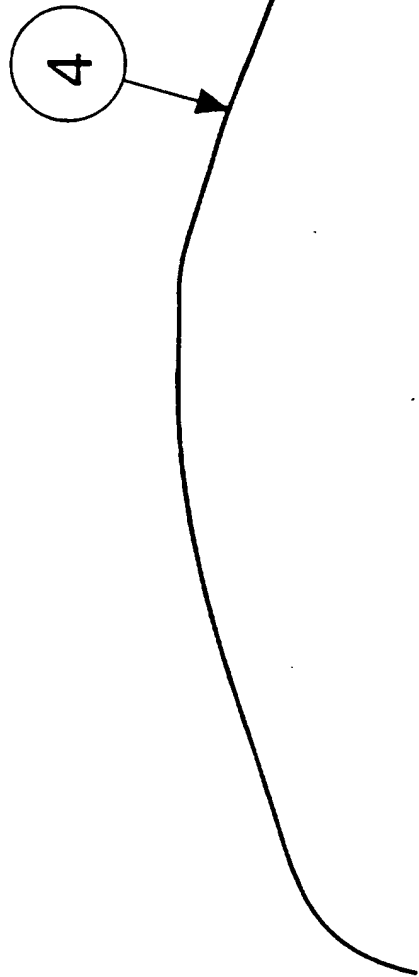


fig. 3

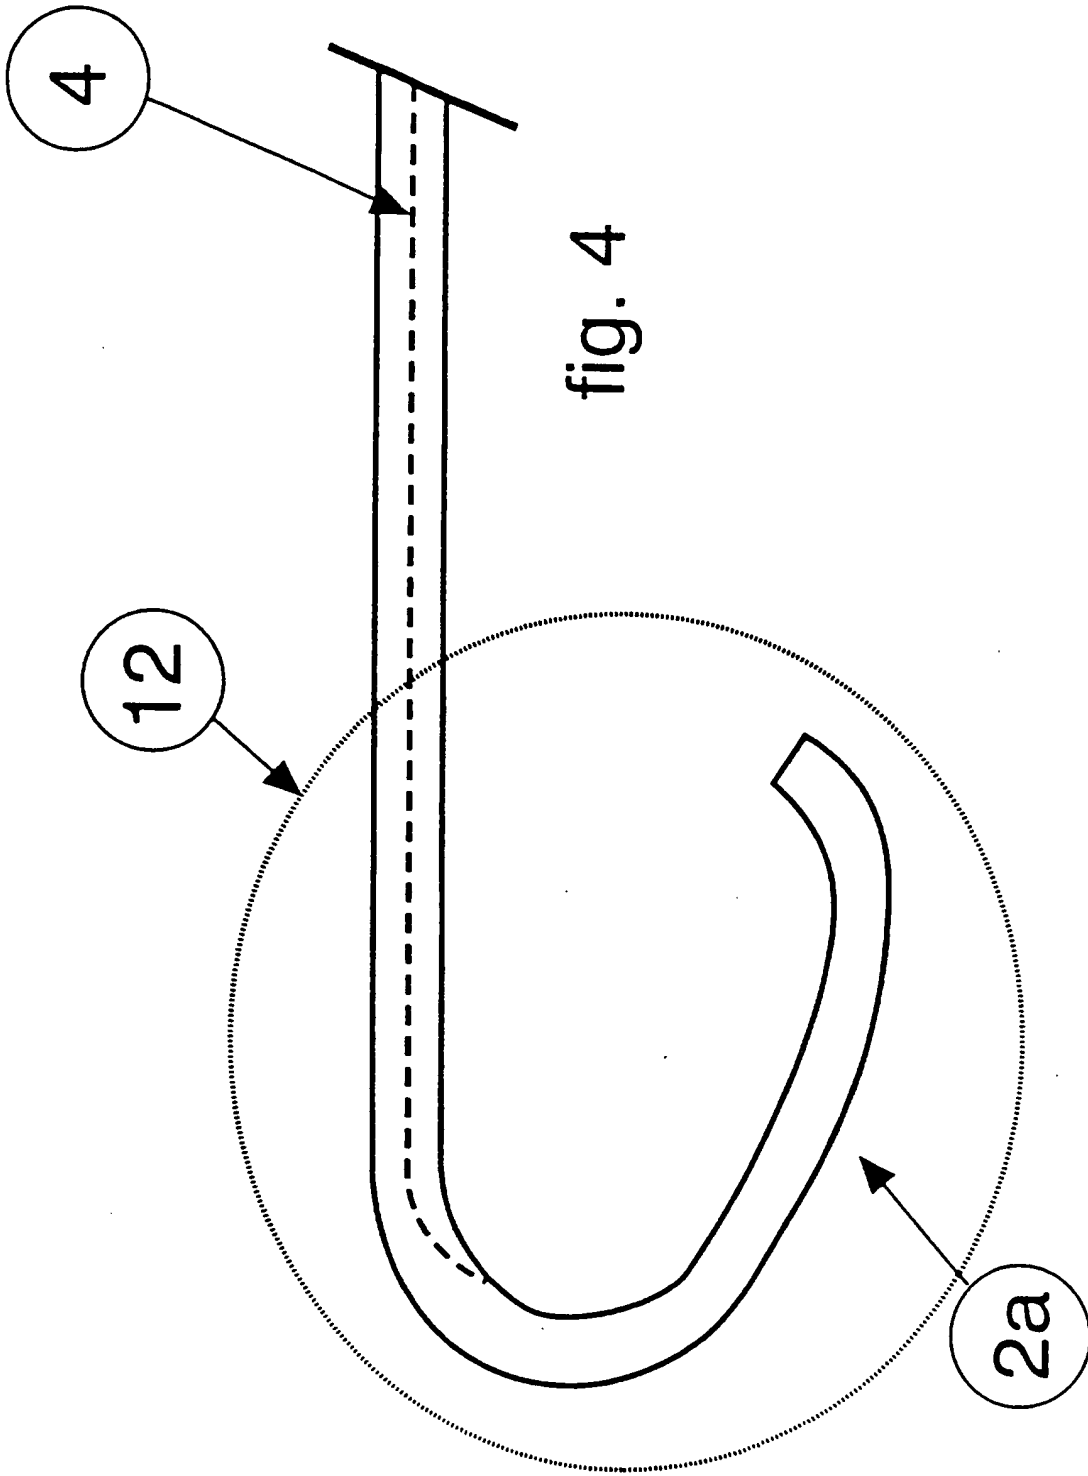


fig. 4

INTERNATIONAL SEARCH REPORT

Inter. nal Application No
PCT/NL 96/00174

A. CLASSIFICATION OF SUBJECT MATTER
IPC 6 A61M25/01

According to International Patent Classification (IPC) or to both national classification and IPC

B. FIELDS SEARCHED

Minimum documentation searched (classification system followed by classification symbols)
IPC 6 A61M A61B

Documentation searched other than minimum documentation to the extent that such documents are included in the fields searched

Electronic data base consulted during the international search (name of data base and, where practical, search terms used)

C. DOCUMENTS CONSIDERED TO BE RELEVANT

Category *	Citation of document, with indication, where appropriate, of the relevant passages	Relevant to claim No.
X	DE 43 33 090 A (SACHSE) 30 March 1995 see page 3, line 60 - page 4, line 17; figures 2,3	1-3
A	---	
A	US 3 605 725 A (BENTOV) 20 September 1971 see column 3, line 63 - line 74; figure 4	1-3
A	---	
A	WO 95 03742 A (EP TECHNOLOGIES) 9 February 1995 see page 6, line 14 - page 9, line 13; figures	1-3

Further documents are listed in the continuation of box C.

Patent family members are listed in annex.

* Special categories of cited documents :

- *A* document defining the general state of the art which is not considered to be of particular relevance
- *E* earlier document but published on or after the international filing date
- *L* document which may throw doubts on priority claim(s) or which is cited to establish the publication date of another citation or other special reason (as specified)
- *O* document referring to an oral disclosure, use, exhibition or other means
- *P* document published prior to the international filing date but later than the priority date claimed

- *T* later document published after the international filing date or priority date and not in conflict with the application but cited to understand the principle or theory underlying the invention
- *X* document of particular relevance; the claimed invention cannot be considered novel or cannot be considered to involve an inventive step when the document is taken alone
- *Y* document of particular relevance; the claimed invention cannot be considered to involve an inventive step when the document is combined with one or more other such documents, such combination being obvious to a person skilled in the art.
- *&* document member of the same patent family

Date of the actual completion of the international search

23 August 1996

Date of mailing of the international search report

30. 08. 96

Name and mailing address of the ISA

European Patent Office, P.B. 5818 Patentlaan 2
NL - 2280 HV Rijswijk
Tel. (+ 31-70) 340-2040, Tx. 31 651 epo nl,
Fax (+ 31-70) 340-3016

Authorized officer

Kousouretas, I

INTERNATIONAL SEARCH REPORT

Information on patent family members

International Application No

PCT/NL 96/00174

Patent document cited in search report	Publication date	Patent family member(s)	Publication date
DE-A-4333090	30-03-95	NONE	
US-A-3605725	20-09-71	NONE	
WO-A-9503742	09-02-95	US-A- 5397321	14-03-95
		CA-A- 2168368	09-02-95
		EP-A- 0711130	15-05-96